

DS-2CE56C2P(N)-IT3

720TVL PICADIS EXIR Turret Camera




EXIR



Key features

- 1/3" PICADIS
- 1.3MP Sensor: 1280 (H) x 960 (V) Effective Pixels
- True Day/Night
- 720 TVL Horizontal Resolution
- 40m IR Distance
- Smart IR
- IP66 Weatherproof
- Wide Operating Temperature Range

Dimensions

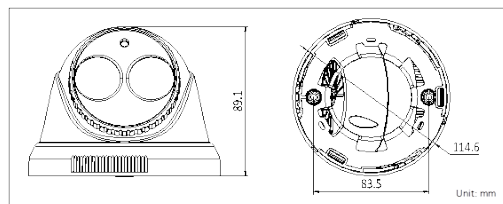

Accessories



DS-1272ZJ-110
Wall mount

Available models

PAL: DS-2CE56C2P-IT3
NTSC: DS-2CE56C2N-IT3

DS-2CE56C2P(N)-IT3	
Camera	
Image Sensor	1/3" PICADIS
Signal System	PAL/NTSC
Effective Pixels	1280 (H) × 960 (V)
Min. Illumination	0.1 Lux @ (F1.2, AGC ON), 0 Lux with IR
Shutter speed	PAL: 1/25 s to 1/25,000 s NTSC: 1/30 s to 1/30,000 s
Lens	3.6mm (2.8mm, 6mm, 8mm, 12mm, 16mm optional) Angle of view: 71.4° (3.6 mm)
Lens Mount	M12
Angle Adjustment	Pan: 0 - 360°, Tilt: 0 - 75°, Rotation: 0 - 360°
Day & Night	IR cut filter with auto switch
Horizontal Resolution	720 TVL
Synchronization	Internal synchronization
Video Output	1Vp-p composite output (75 Ω/BNC)
S/N Ratio	More than 62 dB
BLC	On
General	
Working Temperature/Humidity	-40 °C - 60 °C (-40 °F - 140 °F) Humidity 90% or less (non-condensing)
Power Supply	12 V DC
Power Consumption	Max. 5 W
Ingress Protection	IP66
IR Range	40 meters
Dimensions	Φ 114.6× 89.1mm(Φ 4.5"×3.5")
Weight	300g (0.66 lb)