LTS
Video Solutions for Security Professionals™

Platinum Motorized VF Lens LPR Network IP Camera 2.1MP CMIP7923LPR

Key Features:

- 2.1MP High Definition
- True 120dB Wide Dynamic Range
- 3D DNR,BLC,Intelligent H.264 Zip+
- Audio I/O, Alarm I/O
- IP66
- DC 12V/ PoE

Dimensions:

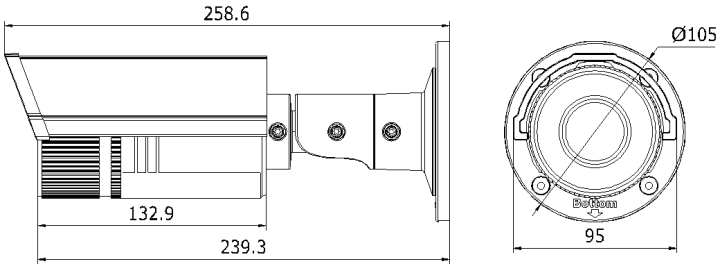



©2015 LT Security, Inc. | info@LTSecurityinc.com | www.LTSecurityinc.com

LTS
Video Solutions for Security Professionals™

Platinum Motorized VF Lens LPR Network IP Camera 2.1MP CMIP7923LPR

CAMERA	
Image Sensor	1/2.8" Progressive Scan CMOS
Min. Illumination	0.01Lux @(F1.2,AGC ON), 0.014 Lux @(F1.4,AGC ON), 0 Lux with IR
Shutter Speed	1/3 s to 1/10,000 s
Slow Shutter	Support
Lens	2.8 - 12 mm @ F1.4, Motorized Lens
Lens Mount	Φ14
Day &Night	IR cut filter with auto switch
DNR	3D DNR
Wide Dynamic Range	120dB
Compression Standard	
Video Compression	H.264 / MJPEG/H.264 Zip+
H.264 Type	Main Profile
Video Bit Rate	32 Kbps ~ 8 Mbps
Audio Compression	G.711/G.722.1/G.726/MP2L2
Audio Bit rate	64Kbps(G.711) / 16Kbps(G.722.1) / 16Kbps(G.726) / 32-128Kbps(MP2L2)
Image	
Max. Resolution	1920 × 1080
Frame Rate	60Hz: 30fps (1920 × 1080, 1280 × 960, 1280 × 720) 50Hz: 25fps(1920 × 1080, 1280 × 960, 1280 × 720)
Image Setting	Rotate Mode, Saturation, Brightness, Contrast, Sharpness adjustable by client software or web browser
BLC	Support, zone configurable
ROI Codec	Support
Network	
Network Storage	NAS (Support NFS,SMB/CIFS), ANR
Alarm Trigger	Motion detection, Tampering alarm, Network disconnect, IP address conflict, Storage exception
Protocols	TCP/IP, UDP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, Bonjour
General	One-key reset, Flash-prevention, dual stream, heartbeat, mirror, password protection, privacy mask, watermark, IP address filtering, Anonymous access
Standard	ONVIF (PROFILE S, PROFILE G), PSIA, CGI, ISAPI
Interface	
Communication Interface	1 RJ45 10M/100M Ethernet port
On-board storage	Built-in Micro SD/SDHC/SDXC slot, up to 128GB
Reset	Yes

©2015 LT Security, Inc. All Rights Reserved. White papers, data sheets, quick start guides, and/or user manuals are for reference only and may or may not be entirely up to date or accurate based upon theversion or models. Product names mentioned herein may be the unregistered and/or registered trademarks of their respective owners.

Platinum Motorized VF Lens LPR Network IP Camera 2.1MP CMIP7923LPR

General	
Working Temperature /Humidity	-22 °F ~ 140 °F (-30 °C ~ 60 °C)
	Humidity 95% or less (non-condensing)
Power Supply	DC12V ±10%, PoE (802.3af)
Power Consumption	Max. 5.5W (Max. 7.5 W with IR cut filter on)
Weather Proof Ratings	IP66
Dimensions	3.7″ × 4.1″ × 10.2″ (95×105×258.6mm)
Weight	2.65lbs (1200 g)

©2015 LT Security, Inc. All Rights Reserved. White papers, data sheets, quick start guides, and/or user manuals are for reference only and may or may not be entirely up to date or accurate based upon the version or models. Product names mentioned herein may be the unregistered and/or registered trademarks of their respective owners.